


# Proximity Readers Standalone **EASIPROX Series**



**DG-120R**  
ANSI Standard

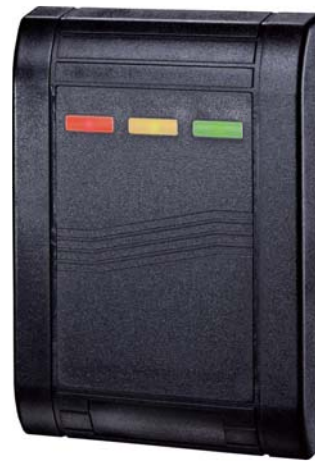

**EASIPROX-980-40**  
ANSI Standard

## Standard Features


- 2000 Proximity cards/Tokens
- LED indicators for status and programming feedback
- Fail-secure or fail-safe capable
- Non-volatile memory protects programmed information in case of power failure
- Request to Exit input

## Specifications

<b>Voltage</b>	12 VAC/DC
<b>Reader Output</b>	NC/COM/NC, Max. 5A/250 VAC
<b>Read Range</b>	10 to 15 cm
<b>Reader Frequency</b>	125KHz
<b>Temperature</b>	-20°C~70°C
<b>Humidity</b>	5%~95% (Non-condensing)
<b>Reader Housing</b>	Plastic ABS
<b>Color</b>	Black (EASIPROX-980-40) Navy blue (DG-120R)

## Dimensions

**DG-120R**

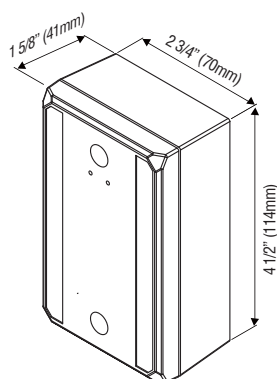

**EASIPROX-980-40**

